

SOLUTIONS BY



MISSION CRITICAL FACILITIES  
DESIGN AND CONSTRUCTION

Covis Sdn Bhd

E-03-01, 1st Floor East Wing  
Subang Square Business Centre  
Jalan SS15/4G, 47500,  
Subang Jaya, Selangor


@ [www.covis-group.com/](http://www.covis-group.com/)  
lawrence.lai@covis-group.com

+603 5621 7780

+603 5621 7790



• 1 Year Warranty •

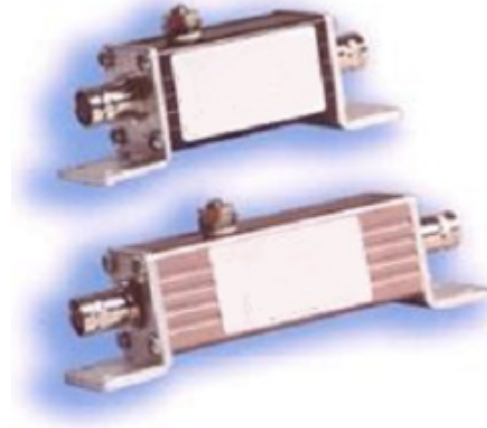

## Data/ Signal Line Protection

### CVS CX Series- CCTV High Exposure

#### Features

- CVS CX-06-M & CVS CX-MI Surge Protective Device (SPD) implements three-stage hybrid technology
- Designed in accordance with NFPA 780 (2004 Edition) requirements, with up to 20kA surge current capability
- Sneak/Fault Current Protection
- Low insertion Loss and Shielded Case
- Comes with one year warranty include labour and parts

#### General Technical Specifications

Operating Voltage	5 VDC
Clamping Voltage	6 VDC
Operating Current	0.15 A
Peak Surge Current	20kA (8x20µS)
Frequency Range	0-20 MHz
Insertion Loss	<1.0 dB at 20 MHz
SPD Technology	GDT, SAD w/ Series PTC
Connection Type	BNC, 50/75 Ohm
Operating Temperature	-40°C to +85°C
Dimensions (Inches)	M1=1.5H x 1W x 3.25L M1=1.5H x 1W x 4L
Weight	M= 2.3 Oz    M1=3 Oz
Certifications	UL 497B, ISO 9001:2000

\*Specification subjects to change without prior notice