

SOLUTIONS BY



MISSION CRITICAL FACILITIES
DESIGN AND CONSTRUCTION

Covis Sdn Bhd

E-03-01, 1st Floor East Wing
Subang Square Business Centre
Jalan SS15/4G, 47500,
Subang Jaya, Selangor


@ www.covis-group.com/
lawrence.lai@covis-group.com

+603 5621 7780

+603 5621 7790



• 1 Year Warranty •

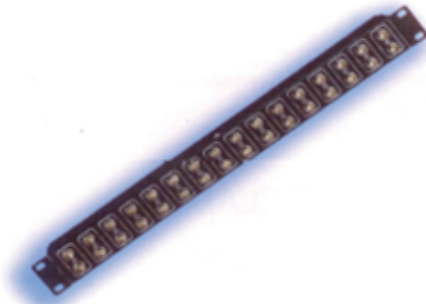

Data/ Signal Line Protection

CVS Channel Rackmount

Features

- Sneak/Fault Current Protection
- Low insertion Loss
- 16 channel coax SPD implementing three stage hybrid technologies & Shielded Case
- Comes with one year warranty include labour and parts

General Technical Specifications

Part Number	RM-CX06-16R
Operating Voltage	5 VDC
Clamping Voltage	6 VDC
Operating Current	0.15 A
Frequency Range	0 to 1 GHz
Peak Surge Current	20kA (8x20µS)
Frequency Range	0-100 MHz
Insertion Loss	<1.0 dB at 20 MHz
SPD Technology	GDT, SAD w/ Series PTC
Connection Type	BNC, 50/75 Ohm
Operating Temperature	-40°C to +85°C
Dimensions (Inches)	1.75H x 19W x 2.0D (1U)
Weight	3.2 lbs
Certification	UL 497, 150 9001:2000

*Specification subjects to change without prior notice

SOLUTIONS BY



Data/ Signal Line Protection